

SPR 80

SIMAG

70 kg Self-contained Ice Machine

Complete range: SPR 80 - SPR 120 - SPR 200

Technical features

- Electronic control
- Stainless steel bodywork - scotch brite
- Air or water cooled
- Direct transmission
- Easily accessible components
- Low power and water consumption
- Reduced dimensions
- Continuous production



Internal bin capacity




25 kg of ice

Type of ice

Flake ice



Residual water content 25 %



Machine dimensions

Net size WxDxH	529 x 626 x 880 mm
Net weight	52 kg
Shipping size WxDxH	600 x 690 x 960 mm
Shipping weight	59 kg

Voltage

230/50/1 Standard version

220-240/60/1 Available on demand

Technology and Certifications



MILANO OFFICE
Sales Dept.
Tel. +39 02 93900215
e-mail: sales@simag.it
Service Dept.
Tel. +39 02 93960357
e-mail: service@simag.it

SIMAG FAR EAST
Singapore Office
Tel. ++65 6738 5393
e-mail: scotsman@scotsman.com.sg


www.simag.it

SPR 80

SIMAG

70 kg Self-contained Ice Machine

Complete range: SPR 80 - SPR 120 - SPR 200

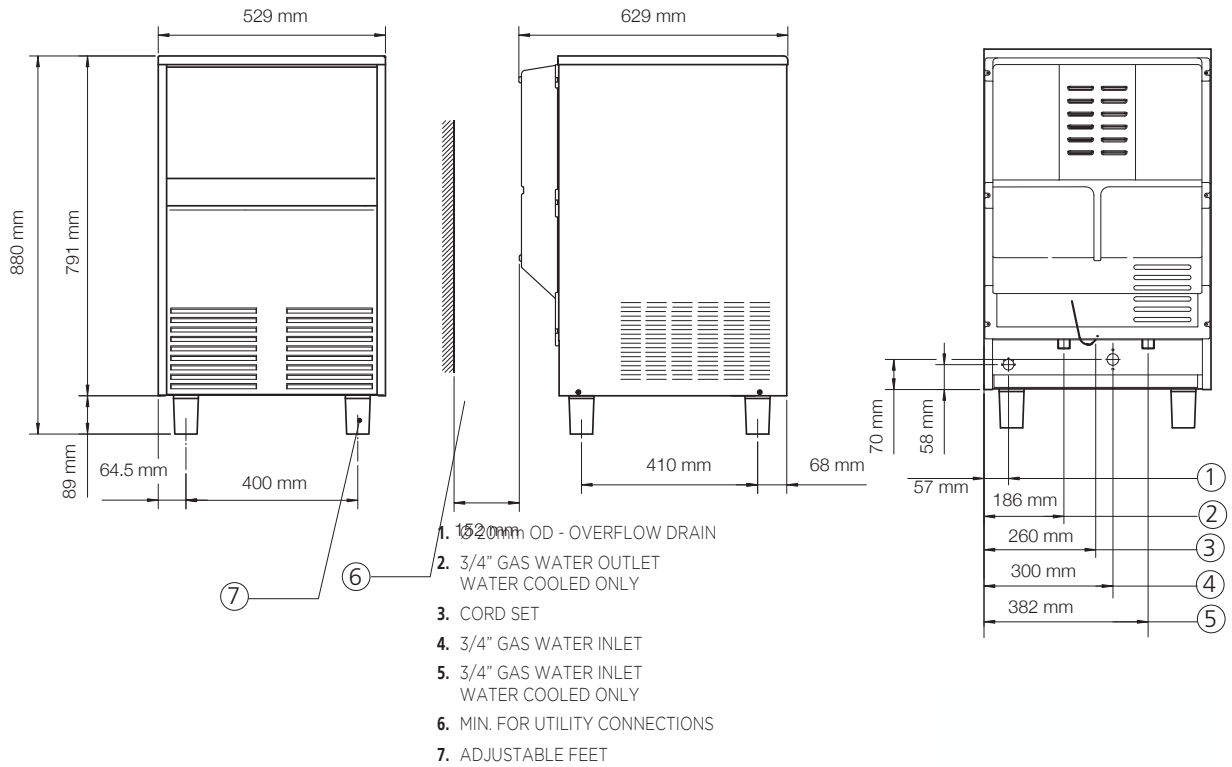

DRAINAGE PER GRAVITY

Operating Limits

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production kg 10°C/10°C	Power input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
				Type	Charge kg		kWh/ 100kg	kWh/ 24h	Water l/h
SPR 80 A	230/50/1	70	340	R134a	0.370	10	n.a.	n.a.	2.2
SPR 80 W	230/50/1	73	300	R134a	0.330	10	n.a.	n.a.	15.0
SPR 80 A	220/60/1	70	340	R134a	0.370	10	n.a.	n.a.	2.2
SPR 80 W	220/60/1	73	n.a.	R134a	n.a.	10	n.a.	n.a.	15.0

(*) Power Input: at 43°C Ambient Temperature
 (***) Water Consumption: at 32°C Air and 21°C Water