

# SDE 24

# SIMAG

## 24 kg Self-contained Ice Machine

Complete range: SDE 18 - SDE 24 - SDE 30 - SDE 34 - SDE 40 - SDE 50 - SDE 64 - SDE 84 - SDE 100 - SDE 170 - SDE 220

### Technical features

- Stainless steel bodywork - scotch brite
- Air or water cooled
- Vertical pump
- Main switch (ON/OFF)
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system



### Internal bin capacity




6 kg of ice

290 cubes

### Type of ice

Hollow Cubes

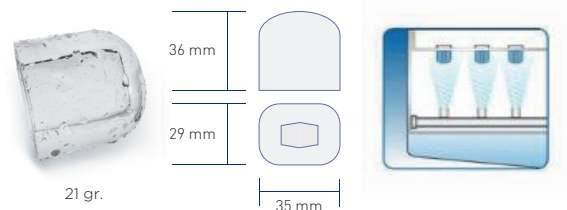

### Machine dimensions

Net size WxDxH	334 x 457 x 599 mm
Net weight	28 kg
Shipping size WxDxH	400 x 530 x 690 mm
Shipping weight	33 kg

### Voltage

230/50/1 Standard version

220-240/60/1 Available on demand

### Technology and Certifications



MILANO OFFICE  
Sales Dept.  
Tel. +39 02 93900215  
e-mail: sales@simag.it  
Service Dept.  
Tel. +39 02 93960357  
e-mail: service@simag.it

SIMAG FAR EAST  
Singapore Office  
Tel. ++65 6738 5393  
e-mail: scotsman@scotsman.com.sg


[www.simag.it](http://www.simag.it)

# SDE 24

# SIMAG

## 24 kg Self-contained Ice Machine

Complete range: SDE 18 - SDE 24 - SDE 30 - SDE 34 - SDE 40 - SDE 50 - SDE 64 - SDE 84 - SDE 100 - SDE 170 - SDE 220

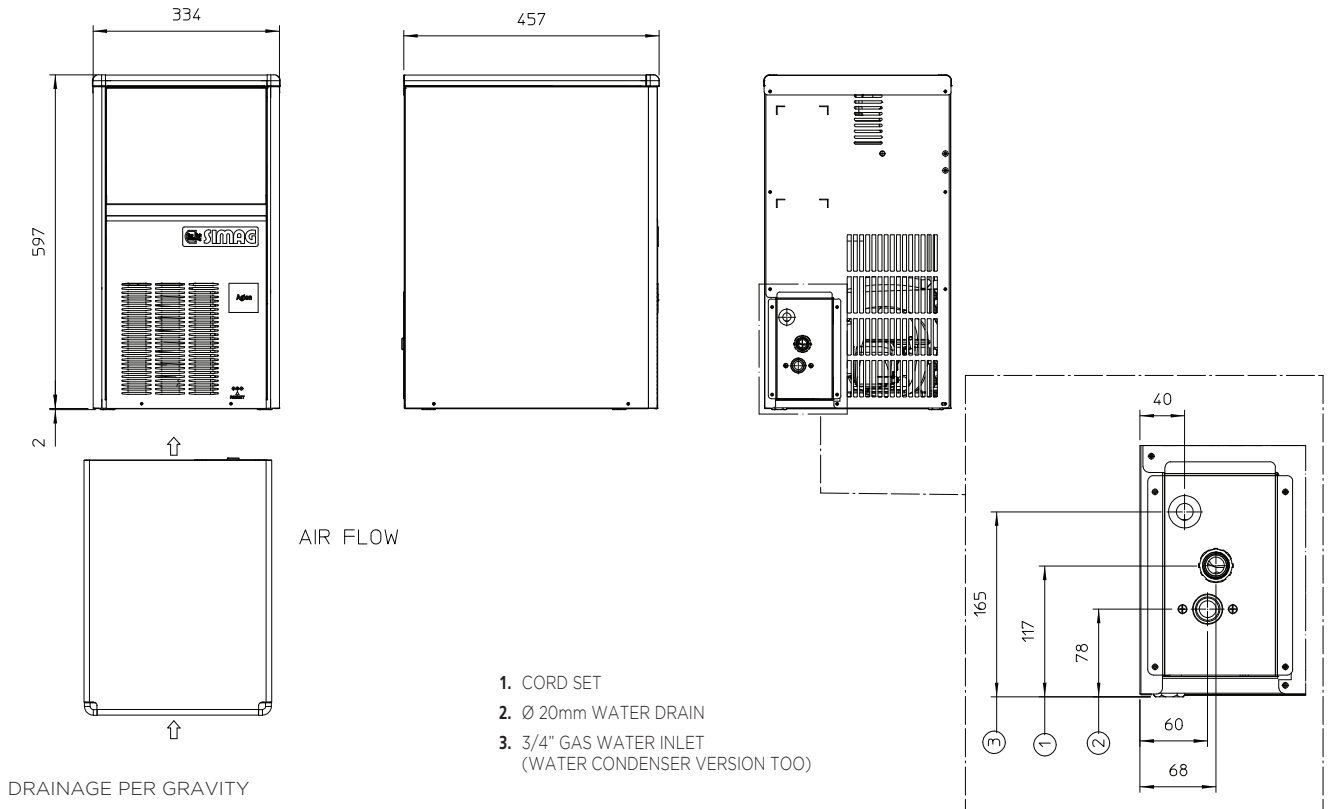

### Operating Limits

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production kg		Power input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge kg		kWh/100kg	kWh/24h	Water l/h
SDE 24 A	230/50/1	24		310	R134a	0.210	10	n.a.	n.a.	2.1
SDE 24 W	230/50/1	21	18	200	R134a	0.150	10	29.03	4.5	25.0
SDE 24 A	220/60/1	24		310	R134a	0.210	10	n.a.	n.a.	2.1
SDE 24 W	220/60/1	22.5		200	R134a	0.150	10	n.a.	n.a.	24.0

(\*) Power Input: at 43°C Ambient Temperature

(\*\*) Water Consumption: at 32°C Air and 21°C Water